


XChange1104

Conduction- or Air-Cooled 6U cPCI Dual-PrPMC Carrier Card with AMCC PPC440GX and PICMG 2.16

- ▶ AMCC PowerPC 440GX
533-800 MHz processor
- ▶ 100 MHz PCI-X cPCI and
local bus interfaces
- ▶ Autosense
system/peripheral slot
- ▶ Hot Swap support
- ▶ Up to 1 GB DDR-333
SDRAM
- ▶ Up to 512 MB soldered
flash
- ▶ 4 MB socketed flash
- ▶ Up to 1 GB CompactFlash
- ▶ Two front panel Gigabit
Ethernet ports
- ▶ Front panel serial port
- ▶ Two PICMG 2.16
backplane Ethernet ports
- ▶ Complies with PICMG 2.0,
2.1, 2.3, 2.9, and 2.16
- ▶ VxWorks BSP
- ▶ Linux BSP
- ▶ IPMI driver

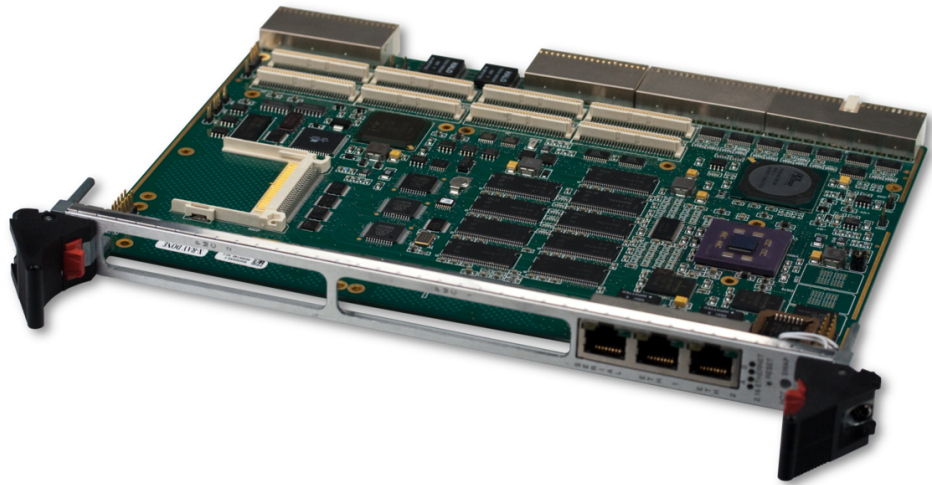

XChange1104

The XChange1104 is a 6U CompactPCI dual-PrPMC carrier card with a PICMG 2.16 Gigabit Ethernet interface. With PCI-X support on both CompactPCI and local bus interfaces, the XChange1104 is ideal for applications requiring high bandwidth and the flexibility that PMC modules offer.

Based on the AMCC PowerPC 440GX Embedded Processor, the XChange1104 is armed with the processing power needed for demanding applications. With integrated PCI-X, DDR SDRAM, and Gigabit Ethernet interfaces, the 440GX offers a highly optimized, yet cost-effective solution for packet processing and general computing.

Hot Swap support allows the XChange1104 to be installed into a live system without disrupting CompactPCI bus activity. In addition, system management bus support allows the card to be powered down and reset remotely through the IPMI interface.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <http://www.xes-inc.com>

Processor

- AMCC PowerPC 440GX processor
- 800 MHz max. processor speed
- 100 MHz PCI-X Interface
- 32 kB L1 instruction / data caches
- 256 kB L2 cache / SRAM
- DDR-333 SDRAM interface
- Two 10/100/1000 Mbps Ethernet controllers

Memory

- Up to 1 GB DDR-333 SDRAM
- Up to 512 MB soldered flash
- 4 MB socketed flash
- Up to 1 GB CompactFlash
- 512-byte SEEPROM

cPCI

- 66 MHz 64-bit PCI interface to J1 and J2
- PICMG 2.1 (Hot Swap support)
- PICMG 2.3 (PMC I/O to J3 and J5)
- PICMG 2.9 (dedicated IPMI controller)
- PICMG 2.16 (two 10/100/1000BASE-T Ethernet ports)

PCI-X PMC Slots

- Maximum aggregate bandwidth of 1 Gbps
- Processor PMC (PrPMC) support
- 10 mm stacking height

Software Support

- Linux BSP
- Wind River VxWorks BSP
- Ethernet and IPMI drivers

Front Panel

- Serial interface
- Two 10/100/1000 Ethernet ports

Physical

- 6U cPCI form factor
- 233.35 mm x 160 mm

Environmental Requirements


Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Power Requirements

- 3.3 V, 3.48 A, 11.5 W
- 5 V, 0.1 A, 0.5 W

Supported Ruggedization Level	Level 1
Cooling Method	Standard Air-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)
Storage Temperature	-40 to +85°C ambient
Vibration	0.002 g ² /Hz, 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing

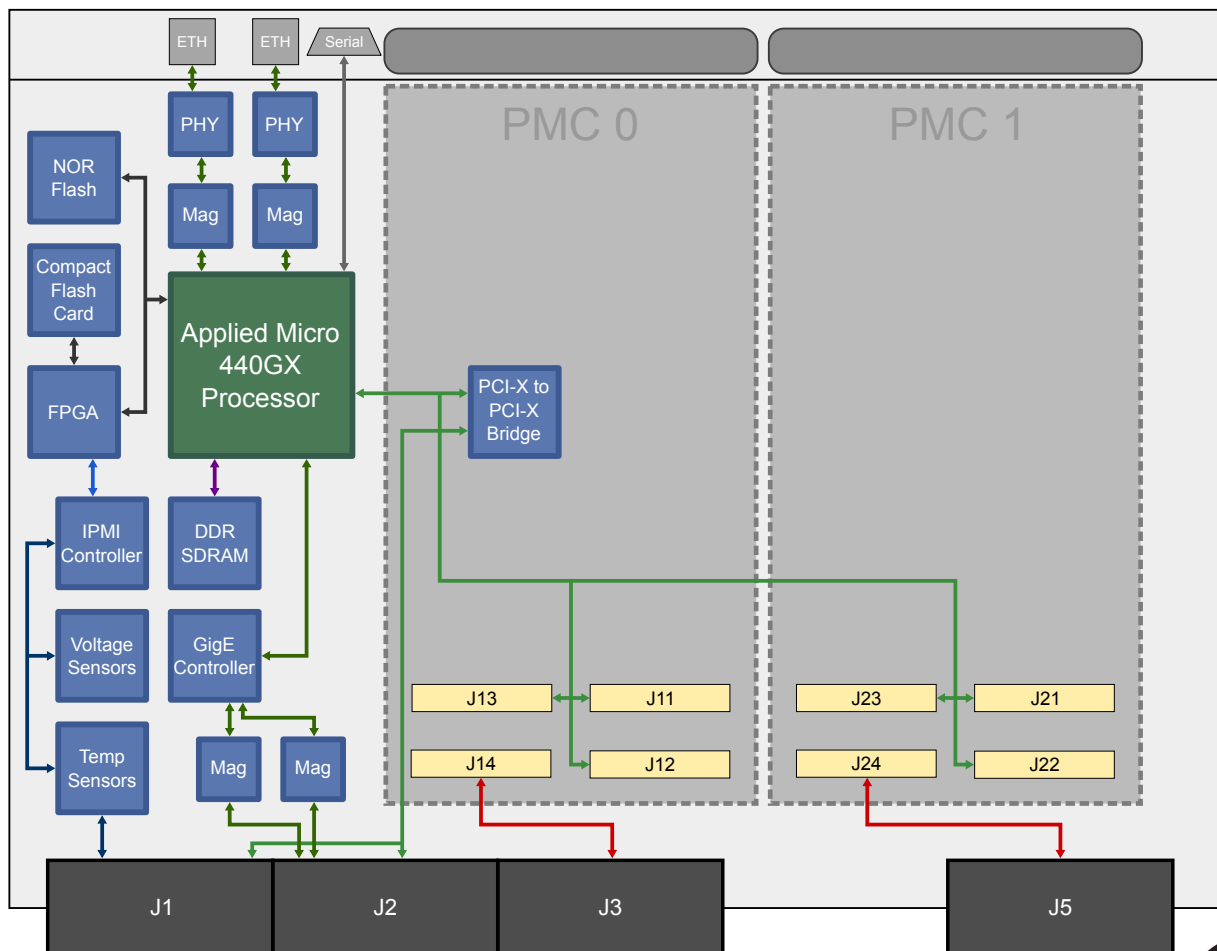

XChange1104

