


XIt1003

6U cPCI Transition Module For PMC I/O Modules

- ▶ 6U cPCI Rear Transition Module (VITA 46.10)
- ▶ Supports breakout of two PICMG 2.16 Gigabit Ethernet ports
- ▶ Supports two PMC I/O Module (PIM) interfaces to route PMC I/O out the rear panel
- ▶ One RS-232 RJ-45 interface

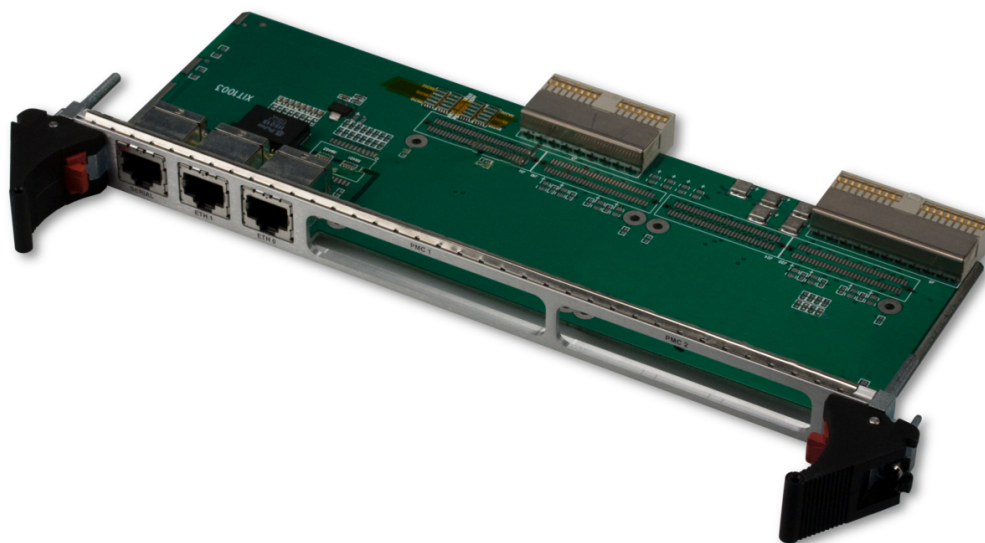

XIt1003

The XIt1003 is a 6U cPCI transition module that hosts two PIM interfaces and supports backplane I/O for several devices in X-ES's product line.

The XIt1003 supports two PIM interfaces to bring P14 I/O from two PMC modules out the rear panel. The PIM interfaces can support all standard PMC I/O Modules.

The transition module also breaks out PICMG 2.16 Gigabit Ethernet ports via RJ-45 connectors. Isolation on the Ethernet signals is a configurable option.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

PIM Support

- Supports up to two PIMs

6U Backplane I/O Support

- Two PICMG 2.16 Gigabit Ethernet ports via RJ-45 connectors

Physical Characteristics

- 6U cPCI
- Dimensions: 233.35 mm x 85.5 mm

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Supported Ruggedization Level	Level 1
Cooling Method	Standard Air-Cooled
Operating Temperature	0 to +55 °C ambient (300 LFM)
Storage Temperature	0 to +85 °C ambient
Vibration	0.002 g ² /Hz, 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing

