


» COMe-bHL6 «

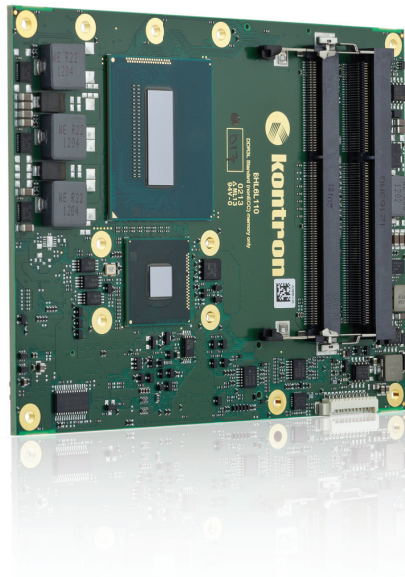


COM Express® basic Type 6 with 4th Generation Intel® Core™ Processors

- » Intel® 4th Generation Core™ i7/i5/i3/Celeron Series with QM87/HM86 PCH
- » With non-ECC DDR3L up to 16GB
- » Triple Independent Display support with Daisy-Chaining and 4k resolutions

Technical Information

Compliance	COM Express® basic, Pin-out Type 6
Dimensions (H x W x D)	125 x 95 mm
CPU	Intel® Core™ i7-4860EQ, Intel® Core™ i7-4850EQ, Intel® Core™ i7-4700EQ, Intel® Core™ i5-4400E, Intel® Core™ i5-4402E, Intel® Core™ i3-4100E, Intel® Core™ i3-4102E, Intel® Celeron® 2000E, Intel® Celeron® 2002E
Chipset	Intel® Mobile QM87 (Core™ i5, i7) Intel® Mobile HM86 (Core™ i3 & Celeron®)
Main Memory	2x DDR3L-1600 SO-DIMM up to 2x8GB
Graphics Controller	Intel® HD5200 (GT3e), Intel® HD4600 (GT2), Intel® HD Graphics (GT1)
Ethernet Controller	Intel® I218LM
Ethernet	10/100/1000 MBit Ethernet
Hard Disk	QM87: 3x SATA 6Gb/s, 1x SATA 3Gb/s HM86: 2x SATA 6Gb/s, 2x SATA 3Gb/s
Flash Onboard	-
PCI Express® / PCI support	7x PCIe x1, 1x PEG x16
Panel signal	DDI1: DP++, DDI2: DP++, DDI3: DP++, VGA: Yes, LVDS: Dual Channel 18/24bit
USB	4x USB 3.0 + 4x USB 2.0
Serial	2x serial interface (RX/TX only)
Audio	Intel® High Definition Audio
Common Features	SPI, LPC, SMB, Fast I ² C, Staged Watchdog, RTC, MARS
BIOS	Phoenix Secure Core UEFI
Humidity	93% relative Humidity at 40°C, non-condensing (according to IEC 60068-2-78)
Options	1x PCIe x1 additional w/o onboard LAN, vPRO (AMT/TXT/AES Support), eDP instead of LVDS
Power Management	ACPI 4.0, S5 Eco
Power Supply	8.5V – 20V Wide Range, Single Supply Power
Special Features	POSCAP capacitors, Trusted Platform Module TPM 1.2, 4k Resolutions, Flexible PEG lane configuration by Setup Option
Operating System	Windows® 8, Windows® 7, WE8S, WES7, Linux, VxWorks
Temperature	Commercial temperature: 0°C to +60°C operating, -30°C to +85°C non-operating Extended temperature: -25°C to +75°C operating, -30°C to +85°C non-operating

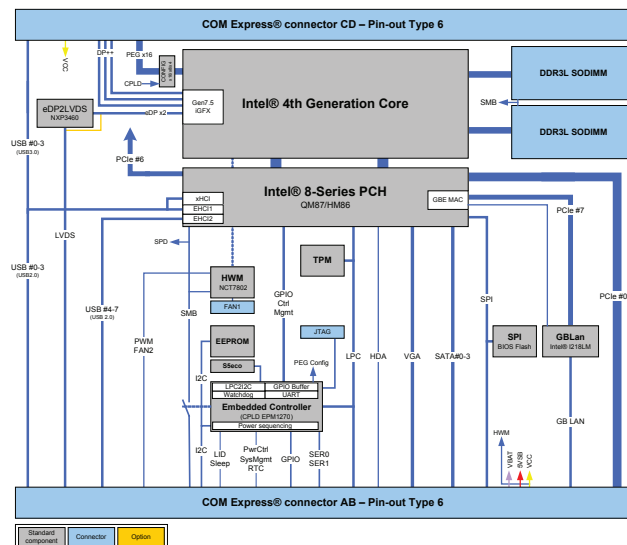

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany

Tel.: +49 8165 77 777
Fax: +49 8165 77 219
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA

Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building, Block #1, ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China

Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn